


*E50 PLUS*



SCRUBBING MACHINES

## *USE AND MAINTENANCE MANUAL*

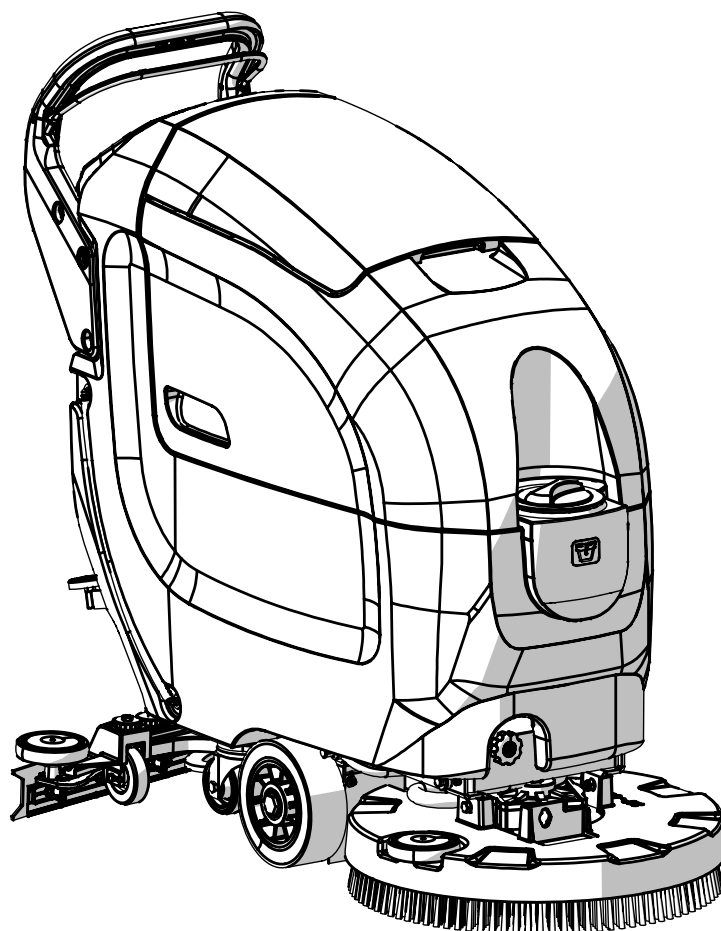











## CONTENTS

<b>CONTENTS</b>	<b>3</b>
<b>LOCATION OF THE MAIN MACHINE COMPONENTS</b>	<b>5</b>
<b>GENERAL DESCRIPTION</b>	<b>6</b>
GENERAL SAFETY REGULATIONS	6
SYMBOLS USED IN THE MANUAL	6
PURPOSE AND CONTENT OF THE MANUAL	7
TARGET GROUP	7
PRESERVATION OF THE USER	7
ON CONSIGNMENT OF THE MACHINE	7
INTRODUCTORY COMMENT	7
IDENTIFICATION DATA	7
TECHNICAL DESCRIPTION	7
INTENDED USE	7
SAFETY	7
REGULATIONS	7
SERIAL NUMBER PLATE	8
<b>TECHNICAL DATA</b>	<b>8</b>
<b>SYMBOLS AND LABELS USED ON THE MACHINE</b>	<b>9</b>
SYMBOLS USED ON THE MACHINE	9
LABELS USED ON THE MACHINE	9
<b>PREPARATION OF MACHINE</b>	<b>10</b>
HANDLING THE PACKAGED MACHINE	10
HOW TO UNPACK THE MACHINE	10
HOW TO MOVE THE MACHINE	11
MACHINE SAFETY	11
TYPE OF BATTERY TO BE USED	11
INSERTING THE BATTERIES IN THE MACHINE	12
BATTERY MAINTENANCE AND DISPOSAL	12
RECHARGING THE BATTERIES	12
INSERTING WATER SYSTEM FILTER	13
ASSEMBLING THE BRUSH	13
ASSEMBLING THE SQUEEGEE BODY	13
FILLING THE SOLUTION TANK WITH WATER	14
DETERGENT SOLUTION	14
<b>PREPARING TO WORK</b>	<b>14</b>
<b>STARTING WORK</b>	<b>15</b>
HOUR METER	16
BATTERY CHARGE LEVEL INDICATOR	16
SCRUBBING WITH DRYING	16
SCRUBBING WITHOUT DRYING	16
SCRUBBING WITH DRYING	16
ADJUSTMENT OF THE DETERGENT SOLUTION FLOW	17
OVERFLOW DEVICE	17
<b>AT THE END OF THE WORK</b>	<b>17</b>
<b>RECOMMENDED MAINTENANCE OPERATIONS</b>	<b>17</b>
CLEANING THE SQUEEGEE BODY	18
CLEANING THE BRUSH HEAD BRUSH	19
DRAINING THE RECOVERY TANK	19
CLEANING THE VACUUM MOTOR FILTER	19
CLEANING THE VACUUM TUBE	19
EMPTYING THE SOLUTION TANK	19
CLEANING THE WATER SYSTEM FILTER	20
<b>EXTRAORDINARY MAINTENANCE WORK</b>	<b>20</b>
REPLACING THE SQUEEGEE BODY RUBBER BLADES	20
REPLACING THE BRUSH	21



<b>ADJUSTMENT INTERVENTIONS.....</b>	<b>21</b>
<i>ADJUSTING THE SQUEEGEE BODY'S RUBBER BLADES .....</i>	<i>21</i>
<b>BRUSHES AND BRUSH PAD HOLDER.....</b>	<b>22</b>
<b>DISPOSAL .....</b>	<b>22</b>
<b>TROUBLESHOOTING.....</b>	<b>22</b>
<b>EC DECLARATION OF CONFORMITY .....</b>	<b>24</b>

## LOCATION OF THE MAIN MACHINE COMPONENTS

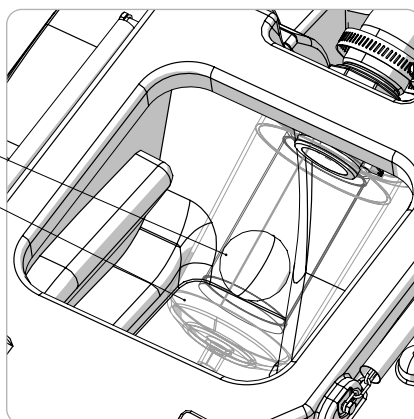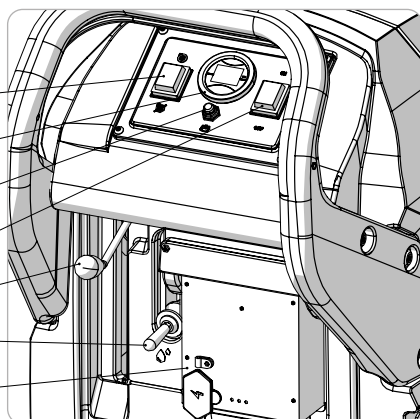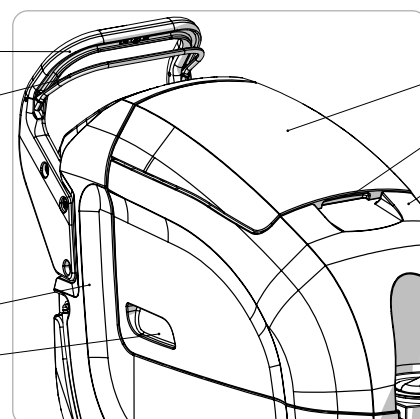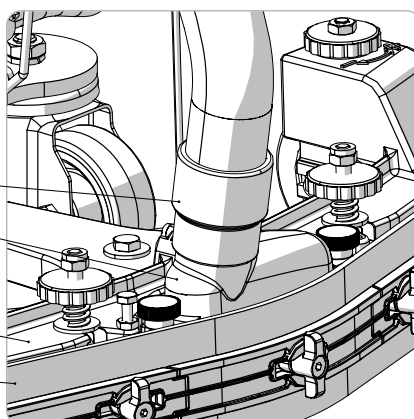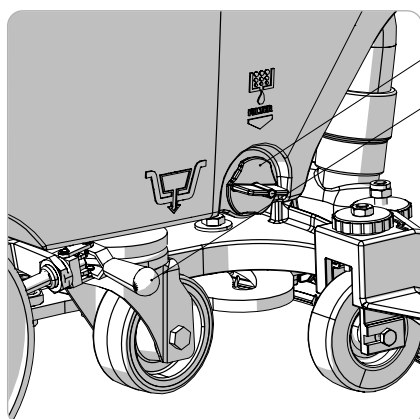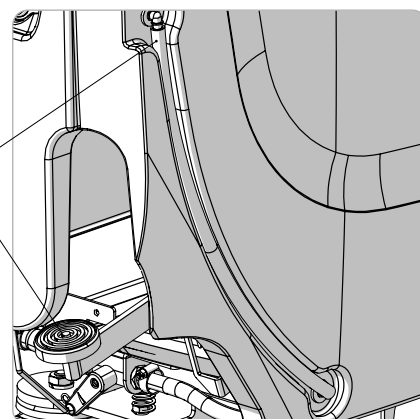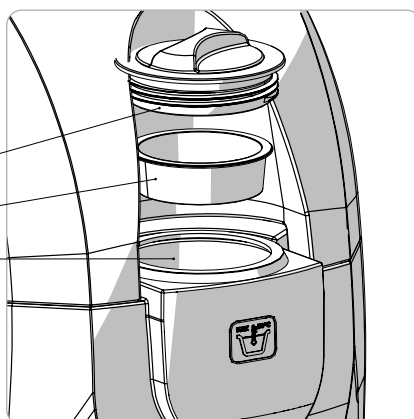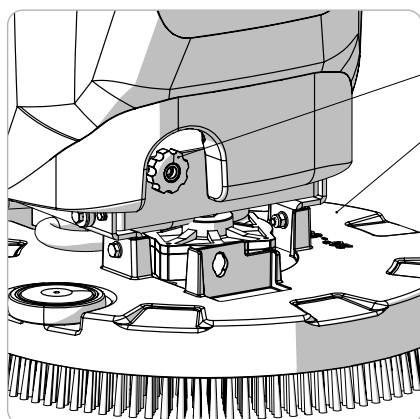

The machine's main components are the following:

1. Brush head tilt adjustment knob.
2. Brush head body.
3. Solution tank filler hole cap.
4. Solution tank filler hole filter.
5. Solution tank filler hole.
6. Detergent solution level tube.
7. Brush head control pedal.
8. Cap - Solution tank filter.
9. Parking brake.
10. Vacuum tube.
11. Vacuum nozzle.
12. Squeegee support.
13. Squeegee body.
14. Control handlebars.

15. Dead man's lever.
16. Solution tank.
17. Recovery tank lifting handle.
18. Recovery tank lid.
19. Recovery tank cover lifting handle.
20. Recovery tank.
21. Vacuum motor control switch.
22. Control display.
23. Brush uncoupling switch.
24. Main switch.
25. Squeegee body lifting lever.
26. Detergent solution adjustment lever.
27. Battery charger (valid for CB versions).
28. Suction motor filter.
29. Suction motor filter cover cup.















## GENERAL DESCRIPTION

The descriptions contained in this document are not binding. The company therefore reserves the right to make any modifications at any time to elements, details, or accessory supply, as considered necessary for reasons of improvement or manufacturing/commercial requirements. The reproduction, even partial, of the text and drawings contained in this document is prohibited by law. **The company reserves the right to make any technical and/or supply modifications. The images are shown as reference only and are not binding as to the actual design and/or equipment.**

## GENERAL SAFETY REGULATIONS

Before using the machine, please read the following document carefully and follow the instructions contained herein, along with the instructions in the document supplied with the machine itself, "GENERAL SAFETY REGULATIONS" (document code 10083659).

## SYMBOLS USED IN THE MANUAL

	<b>Open book symbol with an "i":</b> Indicates the need to consult the instruction manual.
	<b>Open book symbol:</b> Tells the operator to read the user manual before using the device.
	<b>Covered place symbol:</b> The operations preceded by this symbol must always be carried out in a dry, covered area.
	<b>Information symbol:</b> Indicates additional information for the operator, to improve the use of the device.
	<b>Warning symbol:</b> Carefully read the sections preceded by this symbol meticulously following the instructions indicated for the safety of the operator and the device.
	<b>Danger symbol (corrosive substances):</b> The operator should always wear protective gloves to avoid the risk of serious injury to the hands caused by corrosive substances.
	<b>Danger symbol (battery acid leakage):</b> Indicates the danger of leaking acid or acid fumes from the batteries while they are being recharged.
	<b>Danger symbol (moving carriages):</b> Indicates that the packed product should be handled with suitable carriages that conform to legal requirements.
	<b>Mandatory room ventilation symbol:</b> Informs the operator that the room must be ventilated while the batteries are being recharged.
	<b>Symbol indicating the compulsory use of protective gloves:</b> Indicates that the operator should always wear protective gloves, to avoid the risk of serious injury to his hands from sharp objects.
	<b>Symbol indicating the compulsory use of tools:</b> Informs the operator of the need to use tools not included with the machine.
	<b>Symbol indicating a treading ban:</b> Informs the operator that it is forbidden to tread on machine components, as this could lead to serious injury.
	<b>Recycling symbol:</b> Tells the operator to carry out the operations in compliance with environmental regulations in force in the place where the appliance is being used.
	<b>Disposal symbol:</b> Carefully read the sections marked with this symbol for disposing of the appliance.

## PURPOSE AND CONTENT OF THE MANUAL

The aim of this manual is to provide customers with all the information needed to use the machine in the safest, most appropriate and most autonomous way. This includes information concerning technical aspects, safety, operation, downtime, maintenance, spare parts and scrapping. The operators and qualified technicians must carefully read the instructions in this manual before carrying out any operations on the machine. If in doubt about the correct interpretation of instructions, contact your nearest ICE Customer Service Centre to obtain the necessary clarifications.

## TARGET GROUP

This manual is written both for operators and for qualified machine maintenance technicians. Operators must not perform operations that should be carried out by qualified technicians. The manufacturer is not liable for damages resulting from failure to comply with this veto.

## PRESERVATION OF THE USER

The Use and Maintenance Manual must be stored in its special pouch close to the machine, protected from liquids and anything else that could compromise its legibility.

## ON CONSIGNMENT OF THE MACHINE

When the machine is consigned to the customer, an immediate check must be performed to ensure all the material mentioned in the shipping documents has been received, and also to check the machine has not suffered damage during transportation. If this is the case, the carrier must ascertain the extent of the damage at once, informing our customer service office. It is only by prompt action of this type that the missing material can be obtained, and compensation for damage successfully claimed.

## INTRODUCTORY COMMENT

Any floor scrubbing machine can only work properly and effectively if used correctly and kept in full working order by performing the maintenance operations described in the attached documentation. We therefore suggest you read this instruction booklet carefully and read it again whenever difficulties arise while using the machine. If necessary, remember that our assistance service (organised in collaboration with our dealers) is always available for advice or direct intervention.

## IDENTIFICATION DATA

For technical assistance or to request replacement parts, always give the model, the version and the serial number (written on the relevant plate).

## TECHNICAL DESCRIPTION

The **E50 PLUS** is a floor scrubbing machine that can work on various types of floor and dirt thanks to the mechanical action of a brush and the chemical action of a water-detergent solution. As it advances, it collects the dirt removed, along with the detergent solution not absorbed by the flooring itself. **The machine must only be used for this purpose.**

## INTENDED USE

This scrubbing machine was designed and built for the cleaning (scrubbing and drying) of smooth, compact flooring in the commercial, residential and industrial sectors by a qualified operator in proven safety conditions. The scrubbing machine is not suitable for cleaning rugs or carpet floors. It is only suitable for use in closed (or at least covered) places.



**ATTENTION:** the machine is not suitable for use in the rain, or under water jets.



**IT IS FORBIDDEN** to use the machine in environments with an explosive atmosphere to clean dangerous powders or flammable liquids. In addition, it is not suitable as a means of transport for people or objects.

## SAFETY



Operator cooperation is paramount for accident prevention. No accident prevention programme can be effective without the full cooperation of the person directly responsible for machine operation. The majority of occupational accidents that happen either in the workplace or whilst moving are caused by failure to respect the most basic safety rules. An attentive, careful operator is most effective guarantee against accidents and is fundamental in order to implement any prevention programme.

## REGULATIONS

All references to forwards and backwards, front and rear, right and left indicated in this manual should be understood as referring to the operator in a driving position with his hands on the steering wheel.

## SERIAL NUMBER PLATE

The serial number plate is positioned inside the machine, above the electrical system cover carter. It indicates the general machine characteristics, in particular the serial number. The serial number is a very important piece of information and should always be provided together with any request for assistance or when purchasing spare parts. The serial number plate contains the following:

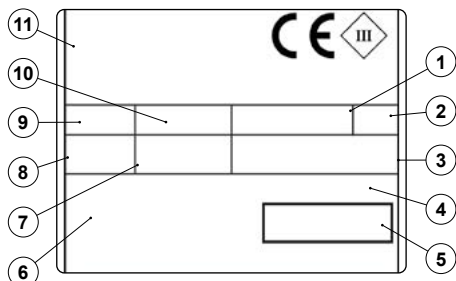

in %).

1. The weight of the batteries used to power the appliance (expressed in Kg).
2. The IP protection rating of the appliance.
3. The gross weight of the appliance (expressed in Kg).
4. The identification code of the appliance.
5. The serial number of the appliance.
6. The name of the appliance.
7. The nominal power consumed by the appliance (expressed in W).
8. The maximum grade that the appliance can handle during work activities (expressed in %).
9. The year in which the appliance was manufactured.
10. The nominal voltage of the appliance (expressed in V).
11. The commercial name of the appliance and the manufacturer's address.

## TECHNICAL DATA

TECHNICAL DATA	U/M [KMS]	E50 Plus
Rated machine power	kW	0,98
Theoretical working capacity up to	m <sup>2</sup> /h	1590
Working width [IEC 62885-9]	mm	510
Squeegee width	mm	703
Drying track [IEC 62885-9]	mm	725
Total width of brushes [IEC 62885-9]	mm	1xØ510
Nominal power of brush motor/s [IEC 62885-9]	W	500
Free brush rotations	rpm	140
Maximum pressure exerted by brushes on floor	N/cm <sup>2</sup>	0.2
Maximum slope during work (GVW)	%	2
Nominal power of vacuum motor/s [IEC 62885-9]	W	480
Maximum vacuum [IEC 62885-9; IEC 60312-1]	KPa	8,79
Maximum solution tank capacity	l	36
Maximum recovery tank capacity	l	59
Machine dimensions during transport [IEC 62885-9]	mm	591
Machine dimensions (length - height - width)	mm	1183 1035 725
Battery compartment dimensions (length - height - width)	mm	355 290 365
Machine weight when empty	kg	75
Transported machine weight	kg	135
GVW	kg	175
Sound pressure level in operator seat [ISO 11201] (L <sub>PA</sub> )	dB	<70
Sound power level [IEC 60335-2-72; IEC 62885-9; ISO 3744] (L <sub>WA</sub> )	dB	<80
Uncertainty K <sub>PA</sub>	dB	±1,5
Hand-arm vibrations [IEC 60335-2-72; IEC 62885-9; ISO 5349-1]	m/s <sup>2</sup>	<2.5
Vibration measurement uncertainty		±4%
IP test [IEC 60335-2-72; IEC 60529]		IP 23



## SYMBOLS AND LABELS USED ON THE MACHINE

### SYMBOLS USED ON THE MACHINE

	<b>Filter body position symbol:</b> Applied to the left-hand side of the machine to indicate the position of the solution tank's filter.
	<b>Solution tank drainage cap symbol:</b> Applied to the left-hand side of the machine to identify the position of the solution tank drain cap.
	<b>Recovery tank drainage hose symbol:</b> Applied to the left-hand side of the machine to identify the position of the recovery tank drain tube.
	<b>Symbol for maximum temperature for filling the solution tank:</b> Located on the front of the machine to indicate the maximum temperature of the water for filling the solution tank safely.
	<b>Symbol indicating tap control lever position open for full flow:</b> Used on the rear right area of the machine to indicate how the tap control lever should be positioned to enable the maximum flow of the detergent solution.
	<b>Symbol indicating tap control lever position for flow shut-off:</b> Used on the rear right area of the machine to indicate how the tap control lever should be positioned to shut off the flow of the detergent solution.
	<b>Suction motor activation symbol:</b> Used on the control panel to indicate how to position the suction motor control switch to activate the machine's vacuum function.
	<b>Suction motor deactivation symbol:</b> Used on the control panel to indicate how to position the suction motor control switch to deactivate the machine's vacuum function.
	<b>Brush release symbol:</b> Used on the control panel to indicate the switch that activates the automatic brush release procedure.
<b>ON</b>	<b>Machine main switch activation symbol:</b> Used on the control panel to indicate how to position the machine's main switch to switch on the machine.
<b>OFF</b>	<b>Machine main switch deactivation symbol:</b> Used on the control panel to indicate how to position the machine's main switch to switch off the machine.

### LABELS USED ON THE MACHINE

	<b>Label indicating the need to read the Use and Maintenance Manual:</b> Used above the recovery tank near the control handlebar to instruct the operator to read the use and maintenance manual before using the machine.
	<b>Label indicating the need to read the Use and Maintenance Manual:</b> Used on the rear part of the machine, near the squeegee control lever, to instruct the operator to read the use and maintenance manual before using the machine.
	<b>Machine use warning label:</b> Used on the rear part of the machine, near the squeegee control lever, to inform the operator that vacuuming/collecting flammable and/or explosive dust and/or liquids or incandescent particles is strictly forbidden.
	<b>Water system filter maintenance label:</b> Used on the left side of the machine, to instruct the operator to clean the water system filter after each work cycle.



**Label warning about the risk of crushed hands:**

Used inside the machine above the solution tank, near the recovery tank lifting handle, to inform the operator of the risk of damage to the hands due to crushing between two surfaces.



**Warning during battery charging label:**

Used inside the machine above the recovery tank, near the batteries, to instruct the operator to take care when performing the battery charge cycle.



**Battery charging sequence label (versions without Battery Charger):**


Used inside the machine above the recovery tank, near the batteries, to inform the operator of the sequence to be followed in order to charge the batteries correctly.



**Battery charging sequence label (versions with battery charger):**

Used inside the machine above the recovery tank, near the batteries, to inform the operator of the sequence to be followed in order to charge the batteries correctly.

## PREPARATION OF MACHINE

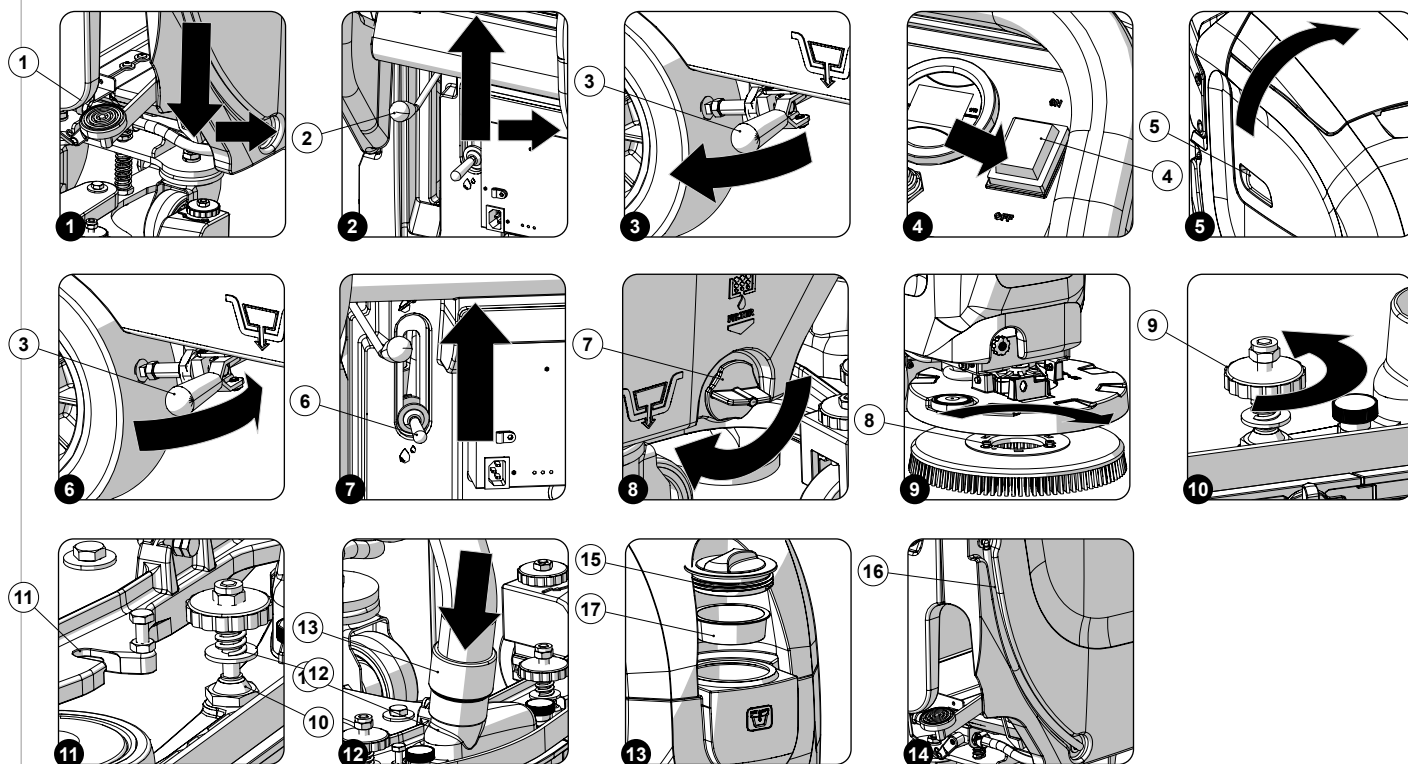

## HANDLING THE PACKAGED MACHINE

The machine's overall weight including packaging is 94kg.

The overall dimensions of the package are: Length = 122cm Width = 58cm Height = 115cm



**ATTENTION:** It is recommended that all the packaging components be kept for any future machine transportation.



**ATTENTION:** Move the packaged product with handling equipment that complies with legal requirements regarding the size and mass of the packaging.

## HOW TO UNPACK THE MACHINE

The machine is shipped in specific packaging. To remove it, proceed as follows:

1. Place the lower part of the outer packaging in contact with the floor.




**N.B.:** Use the pictograms printed on the box as reference.

2. Remove the outer package.

 **CAUTION:** It is recommended to wear the appropriate PPE (Personal Protective Equipment), suitable for the work to be carried out.


3. Raise the brush head body and press the brush head control pedal (1) (on the rear of the machine) downwards (**Fig.1**).
4. Raise the squeegee body and move the squeegee control lever (2) upwards (**Fig.2**). The lever is located on the back of the machine.
5. The machine is fixed to the pallet by means of chocks, which block the wheels and brush head; remove these chocks.
6. Go to the rear left area of the machine and disengage the parking brake, turn the lever (3) clockwise (**Fig.3**).
7. Use a ramp to bring the machine down from the pallet.


 **N.B.:** do not fit the brush and the rear squeegee body before unloading the machine, and avoid any violent jolts to the brush head and squeegee support.

## HOW TO MOVE THE MACHINE


To transport the machine safely, proceed as follows:

1. Check to make sure that the solution tank and the recovery tank are empty. If this is not the case, empty them (see the sections titled "[EMPTYING THE SOLUTION TANK](#)" and "[EMPTYING THE RECOVERY TANK](#)").
2. Make sure the machine is off, if not set the main switch (4) to position "0" (**Fig.4**).
3. Raise the brush head body and press the brush head control pedal (1) (on the rear of the machine) downwards (**Fig.1**).
4. Raise the squeegee body and move the squeegee control lever (2) upwards (**Fig.2**). The lever is located on the back of the machine.
5. Use a ramp to move the machine up onto the transport vehicle.


 **CAUTION:** during this operation, check there are no people or objects near the machine.

 **N.B.:** the ramp gradient must not be such as to cause damage to the machine as it goes up.

6. Grip the handle (5) on the left-hand side of the recovery tank (**Fig.5**) and turn the tank as far as it will go.
7. Disconnect the electrical connector from the general system.

 **WARNING:** This process must be carried out by qualified personnel.


8. Grip the handle (5) and turn the recovery tank until it reaches the working position.
9. Go to the rear left area of the machine and engage the parking brake, turn the lever (3) anticlockwise (**Fig.6**). Secure the machine to the means of transport.

 **WARNING:** secure the device according to the directives in force in the country of use, so that it cannot slide or tip over.

## MACHINE SAFETY

To ensure that work is carried out in the best safety conditions, proceed as follows:

1. Make sure the solution tank is empty. If this is not the case, empty it (read "[EMPTYING THE SOLUTION TANK](#)").
2. Make sure the recovery tank is empty. If this is not the case, empty it (read "[EMPTYING THE RECOVERY TANK](#)").
3. Make sure the machine is off, if not set the main switch (4) to the "OFF" position (**Fig.4**).
4. Raise the brush head body and press the brush head control pedal (1) (on the rear of the machine) downwards (**Fig.1**).
5. Raise the squeegee body and move the squeegee control lever (2) upwards (**Fig.2**). The lever is located on the back of the machine.
6. Go to the rear left-hand side of the machine and engage the parking brake, turn the lever (3) anti-clockwise (**Fig.6**). Grip the handle (5) located on the right side of the recovery tank (**Fig.5**) and turn the recovery tank as far as it will go.
7. Disconnect the electrical connector from the general system.

 **WARNING:** This process must be carried out by qualified personnel.

8. Grip the handle (5) and turn the recovery tank until it reaches the working position.

## TYPE OF BATTERY TO BE USED

Power to the machine must be supplied by four sealed traction batteries with gas recombination or gel technology. The batteries must meet the requirements laid out in the norms: CEI EN 60254-1:2005-12 (CEI 21-5) + CEI EN 60254-2:2008-06 (CEI 21-7). For a good operating performance, we suggest the use of two 12V MFP 77 Ah/C5 batteries. The machine must be powered with a voltage of 24V.

## INSERTING THE BATTERIES IN THE MACHINE

To fit the batteries inside the machine, contact an ICE assistance centre technician.



**WARNING:** ICE declines all responsibility for any damage to property or injury persons in the event that the batteries are replaced by an unauthorized technician.

## BATTERY MAINTENANCE AND DISPOSAL

For battery maintenance and recharging, respect the instructions provided by the battery manufacturer.

When the batteries reach the end of their service life, they must be disconnected by a ICE assistance centre technician or by a specialised and properly trained worker, and must be subsequently removed from the battery compartment using suitable lifting devices.



**N.B.:** dead batteries are classified as dangerous waste and as such must be delivered to an authorised body for disposal.

## RECHARGING THE BATTERIES

The batteries must be charged prior to first use, and whenever they no longer provide sufficient power to perform the desired work.



**CAUTION:** The control board and the battery charger, if present on board, can be set for gel batteries or for lead-acid batteries; contact the nearest ICE assistance centre to modify the setting of the machine.



**CAUTION:** to avoid any permanent damage to the batteries, it is essential to avoid their complete discharge; begin recharging them within a few minutes of noting the "discharged batteries" signal.



**CAUTION:** Never leave the batteries completely discharged, even if the machine is not being used.

1. Bring the machine to the battery recharging area.



**CAUTION:** park the machine in an enclosed place, on a flat and level surface; near the machine there must be no objects that could either damage it, or be damaged through contact with it.



**DANGER:** the room used to recharge the batteries must be adequately ventilated to prevent the accumulation of gases that leak from batteries.

2. Perform the procedure for securing the machine ( see the section titled "[SECURING THE MACHINE](#)").
3. Grip the handle (5) on the right-hand side of the recovery tank (**Fig.5**) and turn the tank as far as it will go.

To recharge the batteries without the built-in battery charger, proceed as follows:



**CAUTION:** the following operations must be carried out by qualified personnel. An incorrect connection of the connector may cause a malfunction of the device.

- Disconnect the electric system connector from the battery connector.
- Connect the external battery charger cable to the battery connector.



**N.B.:** the coupling connector of the battery charger is consigned inside the bag containing this instruction booklet, and must be assembled on the cables of the battery charger as indicated in the instructions.



**DANGER:** before connecting the batteries to the battery charger, make sure it is suitable for the batteries used.



**N.B.:** carefully read the use and maintenance instructions of the battery charger that is used for charging.



**CAUTION:** keep the recovery tank open for the duration of the battery recharging cycle to allow gas fumes to escape.

- Once the recharge cycle has been completed, rotate the recovery tank to the maintenance position and disconnect the battery charger's cable from the battery connector.
- Connect the electrical system connector to the battery connector.
- Grip the handle (5) and turn the recovery tank to its working position.

To recharge the batteries with the on-board battery charger proceed as follows:




**CAUTION:** the following operations must be carried out by qualified personnel. An incorrect connection of the connector may cause a malfunction of the device.




**N.B.:** Carefully read the use and maintenance instructions of the battery charger that is used for charging, this document is delivered along with the machine.

 **CAUTION:** before connecting the batteries to the battery charger, make sure it is suitable for the batteries used.

 **N.B.:** the battery charger power cable is delivered inside the bag containing this instruction booklet.

- Plug the battery charger cable into the mains socket.
- Connect the battery charger's power cable to the socket on the battery charger itself.
- Grip the handle (5) on the left-hand side of the recovery tank (**Fig.5**) and turn the tank as far as it will go.

 **CAUTION:** keep the recovery tank open for the duration of the battery recharging cycle to allow gas fumes to escape.

- Once the recharge cycle has been completed, rotate the recovery tank to the maintenance position and disconnect the battery charger's cable from the battery connector.
- Connect the electrical system connector to the battery connector.
- Grip the handle (5) and turn the recovery tank to its working position.


## INSERTING WATER SYSTEM FILTER

Before using the machine for the first time the water system filter needs to be reset, for shipping reasons the filter cartridge and the cap have been removed. To insert the filter cartridge in the water system filter body proceed as follows:

1. Take the machine to the maintenance area.
2. Make sure the machine has been secured (see the section titled "[SECURING THE MACHINE](#)").

 **CAUTION:** It is recommended to wear the appropriate PPE (Personal Protective Equipment), suitable for the work to be carried out.

3. Tighten the outlet flow of the tap, move the lever (6) on the rear part of the machine upwards (**Fig.7**).
4. Go to the left side of the machine, screw the filter cap (7) into the hole in the solution tank (**Fig.8**).

 **N.B.:** Check that the o-ring seal in the filter cap is positioned correctly.

## ASSEMBLING THE BRUSH

For packaging reasons, the brush is supplied disassembled from the machine. To assemble it on the brush head body, proceed as follows:

1. Perform the procedure for securing the machine ( see the section titled "[SECURING THE MACHINE](#)").


 **CAUTION:** It is recommended to wear the appropriate PPE (Personal Protective Equipment), suitable for the work to be carried out.

2. With the brush head in the raised position, insert the brush into the flange in the brush head body and rotate the brush until the three buttons (8) on the brush slot into the holes located on the brush holder plate (**Fig.9**).
3. To lock, click them into position by turning them anticlockwise to the direction of travel.


## ASSEMBLING THE SQUEEGEE BODY


For packaging reasons, the squeegee body comes disassembled from the machine. In order to mount it on the squeegee support, do the following:

1. Make sure the machine is in a safe condition (read "[MACHINE SAFETY](#)").
2. Raise the squeegee body, moving the squeegee control lever (2) upwards in the direction of the arrow (**Fig.2**). The lever is located on the back of the machine.

 **CAUTION:** It is recommended to wear the appropriate PPE (Personal Protective Equipment), suitable for the work to be carried out.

3. Unscrew the knobs (9) in the squeegee body pre-assembly (**Fig.10**).
4. First insert the left pin (10) on the squeegee body into the left slit (11) in the squeegee support and tighten the knob (9), making sure that the washer (12) is positioned above the upper part of the squeegee support (**Fig. 11**).
5. Tighten the knobs (9) to fix the squeegee body to the support.
6. Repeat the same operation for the right pin.
7. Insert the vacuum tube (13) in the sleeve (14) in the squeegee body (**Fig.12**).

 **N.B.:** the tube must be positioned behind the squeegee lifting chain.

 **N.B.:** Although the squeegee comes pre-adjusted, it is nevertheless recommended to read the section entitled "ADJUSTING THE SQUEEGEE BODY RUBBER BLADES".

## FILLING THE SOLUTION TANK WITH WATER

Before filling the solution tank, carry out the following steps:

1. Take the machine to the usual place for filling the solution tank.
2. Perform the procedure for securing the machine ( see the section titled [“SECURING THE MACHINE”](#)).
3. Check that the solution tank discharge cap (7) is open. If it isn't, open it (Fig.7).
4. Removing the filler opening cap (15) and filling the solution tank by means of a rubber hose or a bucket (Fig.12).
5. Fill with clean water, at a temperature not higher than 50°C and not lower than 10°C. You can check the quantity in the tank by means of the level tube (16) (Fig. 13).

**i N.B.:** Before filling the tank, check that the filter (17) is correctly positioned inside the filler opening (Fig.12).

## DETERGENT SOLUTION

After filling the solution tank with clean water, add the liquid detergent to the tank in the concentration and manner indicated on the detergent manufacturer's label. To prevent the formation of an excessive amount of foam that could damage the vacuum motor, use the minimum percentage of detergent required.



**CAUTION:** It is recommended to wear the appropriate PPE (Personal Protective Equipment), suitable for the work to be carried out.



**ATTENTION:** always use detergents whose manufacturer's label indicates their suitability for scrubbing machines. Do not use acid or alkaline products or solvents without this indication.




**ATTENTION:** always use low-foam detergent. To avoid the production of foam, put a minimum quantity of antifoam liquid in the recovery tank before starting to clean. Do not use pure acids.



**N.B.:** to make it easier to measure the detergent on the cap/measuring device, there are two notches indicating the two main detergent percentage quantities that can be used.

## PREPARING TO WORK

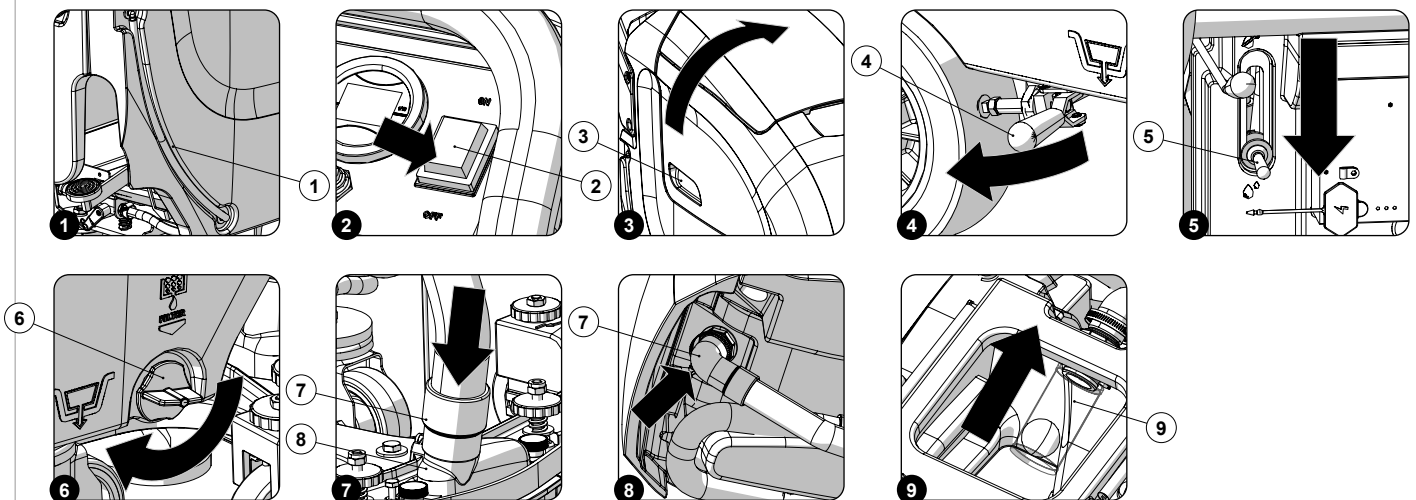

Before beginning to work, it is necessary to:

1. Make sure the recovery tank is empty. If this is not the case, empty it (read [“EMPTYING THE RECOVERY TANK”](#)).
2. Check that the amount of detergent solution in the solution tank is sufficient for the type of work to be performed. If it isn't, top up the solution tank (see [“FILLING THE SOLUTION TANK WITH WATER”](#) and [“DETERGENT SOLUTION”](#)). Check the level tube (1) in the rear right-hand part of the machine (Fig.1).
3. Check the rubber squeegee blades are in good working condition. If they aren't, replace them (see [“REPLACING THE SQUEEGEE BODY RUBBER BLADES”](#)).
4. Check the brush is in good working condition. If it isn't, replace it (see [“REPLACING THE BRUSH”](#)).
5. Make sure the machine is off; if not move the main switch (2) to the “OFF” position (Fig.2).
6. Grip the handle (3) on the right-hand side of the recovery tank (Fig.3) and turn the tank as far as it will go, until it reaches the maintenance position.
7. Connect the main system connector to the battery connector.




**ATTENTION:** This process must be carried out by qualified personnel.

8. Grip the handle (3) and turn the recovery tank until it reaches the working position.
9. Check that the parking brake (4) is not engaged; if it is, turn the lever anti-clockwise (Fig.4).
10. Check that the detergent solution tap is fully open, move the tap control lever (5) downwards (Fig.5).



11. Check that the solution tank filter-cap (6) is closed. If this is not the case, close it (**Fig.6**).
12. Make sure the cap of the recovery tank drainage tube is closed. If it isn't, close it.
13. Make sure the vacuum tube (7) is correctly connected to the sleeve (8) in the squeegee body. If it isn't, connect it (**Fig.7**).
14. Make sure the vacuum tube (7) is correctly inserted into the tube holder in the recovery tank. If this is not the case, connect it (**Fig.8**).
15. Make sure the overfill level float (9) is working correctly (**Fig.9**). If it isn't, clean it (see "[CLEANING THE SUCTION MOTOR FILTER](#)").

## STARTING WORK

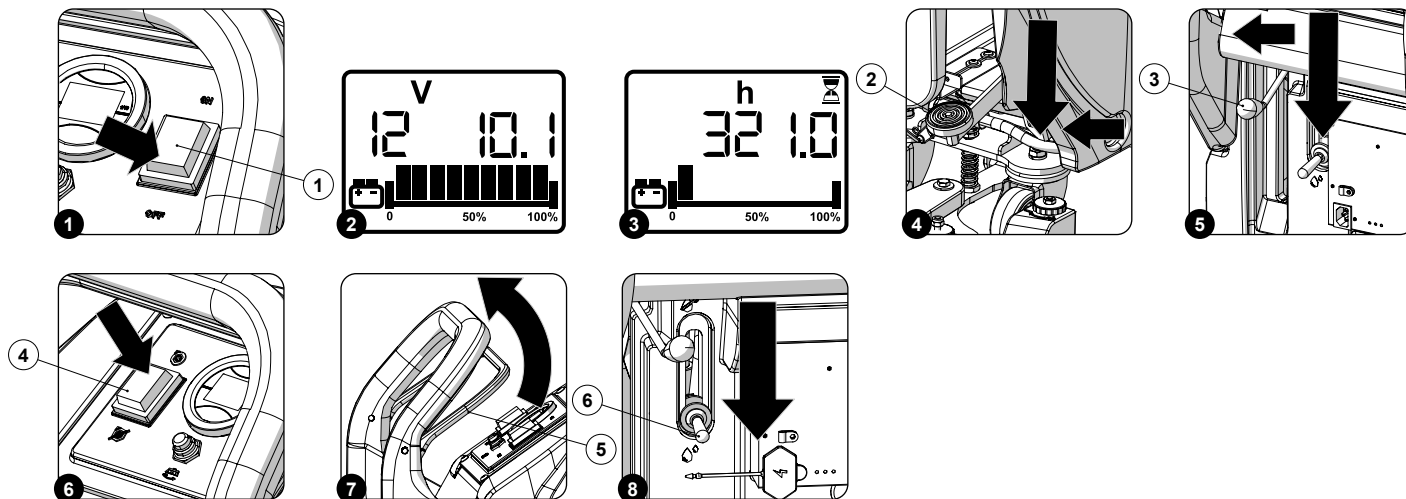

To start working, do as follows:

1. Carry out all the checks listed in the section "PREPARING TO WORK".
2. Go to the driving position, behind the machine.
3. Move the main switch to the "ON" position (1) (**Fig.1**).
4. When the display comes on, the screens appear in sequence.

**i N.B.:** In the first screen the nominal battery voltage programmed into the control board is displayed on the left of the screen, and on the right, the minimum inhibit temperature appears (**Fig.2**).

**i N.B.:** The second screen displays the hours of work completed by the machine (**Fig.3**).

**i N.B.:** the steps for a complete scrubbing and drying cycle are explained below.

5. Lower the brush head body and detach the pedal (2) at the rear of the machine from the plate retainer (**Fig.4**).
6. Lower the squeegee body and detach the lever (3) at the rear of the machine from the plate retainer (**Fig.5**).
7. Move the suction motor control switch to the "ON" position (4) (**Fig.6**).
8. When the dead man's lever (5) is pressed, the solenoid valve will begin to deliver the detergent solution to the brush. The lever is located underneath the control handlebars (**Fig.7**).

**i N.B.:** Once the brush head body has reached its working position, the corresponding gearmotor start working.

9. During the first few metres, check that the detergent solution coming out is suitable for the task in hand. If it isn't, adjust it after reading the section "REGULATING THE DETERGENT SOLUTION".

The machine will now begin to work with full efficiency until the battery is flat or until the detergent solution has finished. During the first few metres, check that there is sufficient solution and that the squeegee is drying correctly.

**i N.B.:** If the dead man's lever is released during the work, the brush motor will continue to work until the brush head body is lifted from the floor, by pressing the brush head body control pedal (2) on the rear of the machine.

**i N.B.:** If the dead man's lever is released during the work, the solenoid valve will cease to deliver the detergent solution.

**i N.B.:** If the dead man's lever is released during the work, the suction motor will continue to work until it is switched off via the switch (4) on the control panel.

**i N.B.:** when filling the solution tank, it is good practice to empty the recovery tank using the special drainage hose.

## HOURLY METER

The machine control panel contains the control display, which shows the total usage time. The numbers before the letter "h" identify the hours, while the numbers before the letter "m" identify the tenths of an hour (a tenth of an hour corresponds to six minutes). The flashing ":" symbol indicates that the hour meter is counting the machine functioning time.

## BATTERY CHARGE LEVEL INDICATOR

On the lower part of the display, you can see the battery charge level. When the batteries fitted in the machine are fully charged, the line at the bottom consists of nine illuminated indicator bars. As the batteries gradually run down, the indicator bars are no longer illuminated. When the battery "critical charge" threshold is reached, the last indicator bar flashes for about 20 seconds, after which the "battery" symbol begins to flash.

## SCRUBBING WITH DRYING

To carry out "SCRUBBING AND DRYING" tasks, proceed as follows:

1. Go to the driving position, behind the machine.
2. Move the main switch to the "ON" position (1) (Fig.1).
3. Lower the brush head body and detach the pedal (2) at the rear of the machine from the plate retainer (Fig.4).
4. Lower the squeegee body and detach the lever (3) at the rear of the machine from the plate retainer (Fig.5).
5. Move the suction motor control switch to the "ON" position (4) (Fig.6).
6. When the dead man's lever (5) is pressed, the solenoid valve will begin to deliver the detergent solution to the brush. The lever is located underneath the control handlebars (Fig.7).

**i** **N.B.:** Once the brush head body has reached its working position, the corresponding gearmotor start working.

7. During the first few metres, check that the detergent solution coming out is suitable for the task in hand. If it isn't, adjust it after reading the section "[REGULATING THE DETERGENT SOLUTION](#)".

**i** **N.B.:** If the dead man's lever is released during the work, the brush motor will continue to work until the brush head body is lifted from the floor, by pressing the brush head body control pedal (2) on the rear of the machine.

**i** **N.B.:** If the dead man's lever is released during the work, the solenoid valve will cease to deliver the detergent solution.

**i** **N.B.:** If the dead man's lever is released during the work, the suction motor will continue to work until it is switched off via the switch (4) on the control panel.

## SCRUBBING WITHOUT DRYING

To carry out "SCRUBBING WITHOUT DRYING" tasks, proceed as follows:

1. Go to the driving position, behind the machine.
2. Move the main switch to the "ON" position (1) (Fig.1).
3. Lower the brush head body and detach the pedal (2) at the rear of the machine from the plate retainer (Fig.4).
4. When the dead man's lever (5) is pressed, the solenoid valve will begin to deliver the detergent solution to the brush. The lever is located underneath the control handlebars (Fig.7).

**i** **N.B.:** Once the brush head body has reached its working position, the corresponding gearmotor start working.

5. During the first few metres, check that the detergent solution coming out is suitable for the task in hand. If it isn't, adjust it after reading the section "[REGULATING THE DETERGENT SOLUTION](#)".

**i** **N.B.:** If the dead man's lever is released during the work, the brush motor will continue to work until the brush head body is lifted from the floor, by pressing the brush head body control pedal (2) on the rear of the machine.

**i** **N.B.:** If the dead man's lever is released during the work, the solenoid valve will cease to deliver the detergent solution.

## SCRUBBING WITH DRYING

To carry out "DRYING" tasks, proceed as follows:



**The drying without scrubbing operation should only be carried out if the machine was previously used to carry out a scrubbing without drying operation.**

1. Go to the driving position, behind the machine.
2. Move the main switch to the "ON" position (1) (Fig.1).
3. Lower the squeegee body and detach the lever (3) at the rear of the machine from the plate retainer (Fig.5).
4. Move the suction motor control switch to the "ON" position (4) (Fig.6).
5. Drying.



## ADJUSTMENT OF THE DETERGENT SOLUTION FLOW


To adjust the flow of detergent solution on the brush, proceed as follows:

1. Open the detergent solution outlet flow to the maximum, move the tap control lever (6) downwards (**Fig.8**).
2. When the dead man's levers are pressed (5) (**Fig.7**), the solenoid valve will distribute the detergent solution to the brush.
3. During the first few metres, check to make sure that the quantity of solution is sufficient to wet the floor, but not so much as to come out of the splash guard. Use the lever (5) to adjust the flow.

## OVERFLOW DEVICE

The machine is NOT equipped with an overflow device, because the volume of the recovery tank is greater than the capacity of the solution tank. In extraordinary cases, there is a mechanical device (float) under the recovery tank lid that, when the recovery tank is full, shuts off the air to the vacuum motor intake to protect it; the sound of the suction motor will then be deeper. Empty the recovery tank (see "[EMPTYING THE RECOVERY TANK](#)").

## AT THE END OF THE WORK

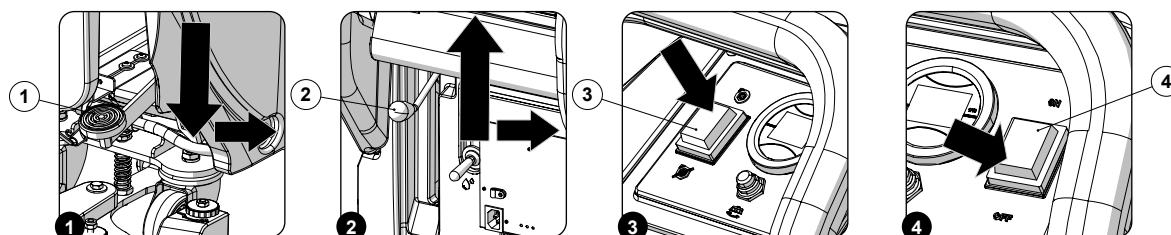

At the end of the work, and before carrying out any type of maintenance, perform the following operations:

1. Lift the brush head body by pressing the pedal (1) at the rear of the machine (**Fig.1**).

**i** **N.B.:** to lock the brush head in the raised position, depress the pedal (1) fully and then move it towards the right-hand side of the machine (**Fig.1**).

2. Lift the squeegee body by moving the lever (2) at the rear of the machine upwards (**Fig.2**).


**i** **N.B.:** to lock the squeegee in the raised position, move the lever (2) as far as it will go and then move it towards the right-hand side of the machine (**Fig.2**).


3. Turn off the suction motor, turning the switch (3) to the "OFF" position (**Fig.3**).
4. Turn off the machine, turning the main switch (4) to the "OFF" position (**Fig.4**).
5. Take the machine to the maintenance area.
6. Carry out all the procedures listed in the chapter "[RECOMMENDED PERIODIC MAINTENANCE](#)" indicated in the column "AT THE END OF THE WORK".
7. Once the maintenance operations are complete, take the machine to the designated storage location.

**⚠ ATTENTION:** Park the machine in an enclosed place, on a flat surface; near the machine there must be no objects that could either damage it, or be damaged through contact with it.

8. Secure the machine, see the section titled "[SECURING THE MACHINE](#)".

## RECOMMENDED MAINTENANCE OPERATIONS

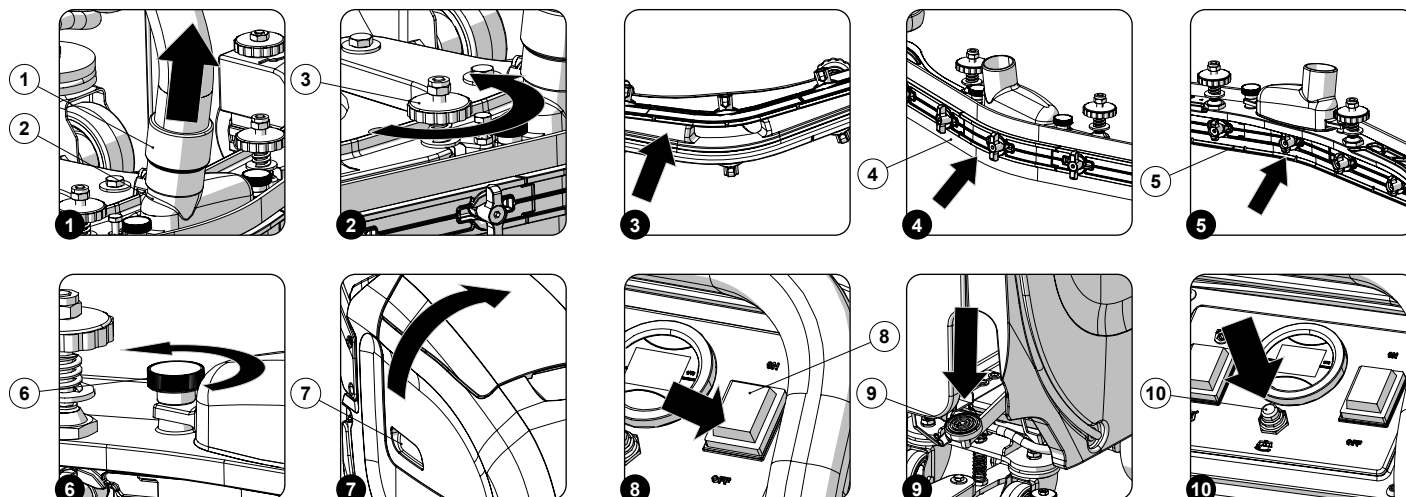

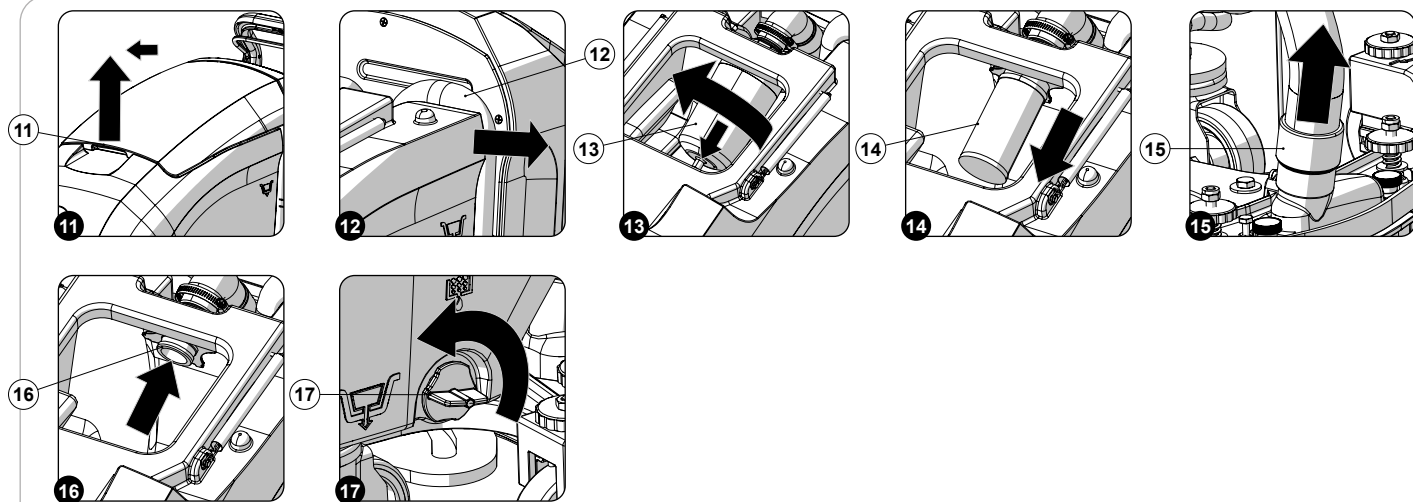

INTERVAL	MACHINE COMPONENTS	PROCEDURE
DAILY BEFORE A LONG PERIOD OF INACTIVITY	Squeegee	Clean the vacuum chamber; the squeegee rubber blades; the vacuum nozzle (see " <a href="#">CLEANING THE SQUEEGEE BODY</a> ").
	Brush head brushes	Clean the brush located in the brush head body (see " <a href="#">CLEANING THE BRUSH HEAD BRUSH</a> ").
	Recovery tank	At the end of every working day, empty the recovery tank (see " <a href="#">EMPTYING THE RECOVERY TANK</a> ").
		At the end of every working day, after having emptied the recovery tank, clean the vacuum system filter (see " <a href="#">CLEANING THE SUCTION MOTOR FILTER</a> ").
	Solution tank	At the end of every working day, after having emptied the recovery tank, clean the vacuum tube (see " <a href="#">CLEANING THE VACUUM TUBE</a> ").
WEEKLY	Machine water system	Clean the filter in the machine's water system (see " <a href="#">CLEANING THE WATER SYSTEM FILTER</a> ").
	Squeegee rubber blades	Check that the rubber blades on the squeegee body are intact and inspect for wear; if necessary, replace these (see " <a href="#">REPLACING THE SQUEEGEE BODY RUBBER BLADES</a> ").
	Brush head brushes	Check that the brush in the brush head body is intact and inspect for wear; if necessary, replace this (see " <a href="#">REPLACING THE BRUSH HEAD BRUSH</a> ").
MONTHLY	Squeegee rubber blade levelling	Check that the rubber blades on the squeegee body are level and if necessary, adjust these (see " <a href="#">ADJUSTING THE SQUEEGEE BODY RUBBER BLADES</a> ").

Before carrying out any routine maintenance operations, proceed as follows:

1. Take the machine to the maintenance area.



**N.B.:** the place designated for this operation must comply with current environmental protection regulations.

2. Make sure the machine is in a safe condition (see chapter "[MACHINE SAFETY MEASURES](#)").



**CAUTION:** it is recommended to wear the appropriate PPE (Personal Protective Equipment), suitable for the work to be carried out.

## CLEANING THE SQUEEGEE BODY

The careful cleaning of the whole vacuum unit ensures better drying and cleaning of the floor as well as a longer vacuum motor life. To carry out the cleaning of the squeegee body, proceed as follows:

1. Remove the vacuum hose (1) from the vacuum nozzle (2) on the squeegee unit (**Fig.1**).
2. Completely unscrew the knobs (3) on the squeegee body pre-assembly (**Fig.2**).
3. Remove the squeegee body from the slits in the squeegee connector.
4. Thoroughly clean the squeegee body vacuum chamber with a jet of water, and then with a damp cloth (**Fig.3**).
5. Thoroughly clean the squeegee body's rear rubber blade (4) with a jet of water, and then with a damp cloth (**Fig.4**).
6. Thoroughly clean the squeegee body front rubber blade (5) with a jet of water, and then with a damp cloth (**Fig.5**).
7. Fully unscrew the knobs (6) that fix the nozzle to the squeegee body (**Fig.6**).

8. Thoroughly clean the vacuum nozzle with a jet of water, and then with a damp cloth.
9. Proceed in the opposite order to reassemble all the parts.

**i** **N.B.:** Check the wear of the rear rubber blade (4) and the front rubber blade (5) on the squeegee body; if the edge of the rubber in contact with the floor is worn, replace it. See "[REPLACING THE SQUEEGEE BODY RUBBER BLADES](#)".

## CLEANING THE BRUSH HEAD BRUSH

Careful cleaning of the brush guarantees better cleaning of the floor, as well as a longer brush head gearmotor lifespan. To clean the brush, proceed as follows:

1. Grip the handle (7) on the right-hand side of the recovery tank (**Fig.7**) and turn the tank as far as it will go.
2. Connect the electrical system connector to the battery connector.
3. Grip the handle (7) and turn the recovery tank to its working position.
4. Go to the front of the machine.
5. Turn on the machine, turning the main switch (8) to the "ON" position (**Fig.8**).
6. With the brush head partially raised from the floor, to lift the brush head body, use the pedal (9) located on the rear part of the machine (**Fig.9**), and press the brush release button (10) for more than three seconds (**Fig.10**).

**⚠ CAUTION:** do not stand near the brush head body while the brush is being uncoupled.

7. Clean the brush under running water to remove any impurities from its bristles.
8. See "[INSTALLING THE BRUSH](#)" for instructions on refitting the brushes in the brush head body.

**i** **N.B.:** Check that the bristles are not worn; in the event of excessive wear, replace the brush (the bristles should be at least 10 mm long). Read the paragraph "[REPLACING THE BRUSH](#)" to replace the brush.

## DRAINING THE RECOVERY TANK

Proceed as follows to empty the recovery tank:

1. Grip the handle (11) and move the recovery tank cover to the side (**Fig.11**).
2. Remove the recovery tank drainage tube (12) from the stops; it is located in the space between the recovery tank and the solution tank (**Fig.12**).
3. Bend the end of the drainage tube, so as to create a choke and prevent the contents from coming out, put the tube on the discharge surface, unscrew the cap and gradually release the tube.
4. Repeat the operations in reverse order to reassemble all the parts.

## CLEANING THE VACUUM MOTOR FILTER

Careful cleaning of the suction motor filter guarantees better cleaning of the floor as well as a longer life for the suction motor. Clean the suction motor filter as follows:

1. Make sure the recovery tank is empty. If this is not the case, empty it (read "[EMPTYING THE RECOVERY TANK](#)").
2. Grip the handle (11) and move the recovery tank cover to the side (**Fig.11**).
3. Remove the float cover (13), turning it in the direction of the arrow (**Fig.13**).
4. Remove the filter-float (14) (**Fig.14**). Rinse the inside with a jet of water. If necessary, use a spatula to remove the sludge that has accumulated at the bottom of the float.
5. Repeat the operations in reverse order to reassemble all the parts.

## CLEANING THE VACUUM TUBE

Careful cleaning of the vacuum hose guarantees better cleaning of the floor as well as a longer vacuum motor life. Proceed as follows to clean the vacuum hose:

1. Stand at the back of the machine.
2. Extract the vacuum tube (15) from the vacuum nozzle on the squeegee body (**Fig.15**).
3. Grip the handle (11) and move the recovery tank cover to the side (**Fig.11**).
4. Remove the float cover (13), turning it in the direction of the arrow (**Fig.13**).
5. Remove the filter-float (14) (**Fig.14**).
6. Insert the water pipe into the filter-float support (16) and clean the inside of the suction pipe with a jet of running water (**Fig.16**).
7. Repeat the operations in reverse order to reassemble all the parts.

## EMPTYING THE SOLUTION TANK

Proceed as follows to empty the solution tank:


1. Remove the detergent solution cap-filter (17), turning it anti-clockwise (**Fig.17**).
2. Remove the cap and empty the tank. With the solution tank empty, rinse the inside of the solution tank with a jet of running water.
3. Repeat the operations in reverse order to reassemble all the parts.

## CLEANING THE WATER SYSTEM FILTER

Careful cleaning of the water system filter guarantees better cleaning of the floor as well as a longer lifespan of the solenoid valve present in the brush head body. To clean the water system filter, proceed as follows:

1. Remove the detergent solution cap-filter (17), turning it anti-clockwise (**Fig.17**).
2. Remove the filter-cap and rinse under a jet of water, using a brush to eliminate any impurities if necessary.
3. When the filter-cap is clean, repeat the operations in the reverse order to reassemble all the parts.

## EXTRAORDINARY MAINTENANCE WORK

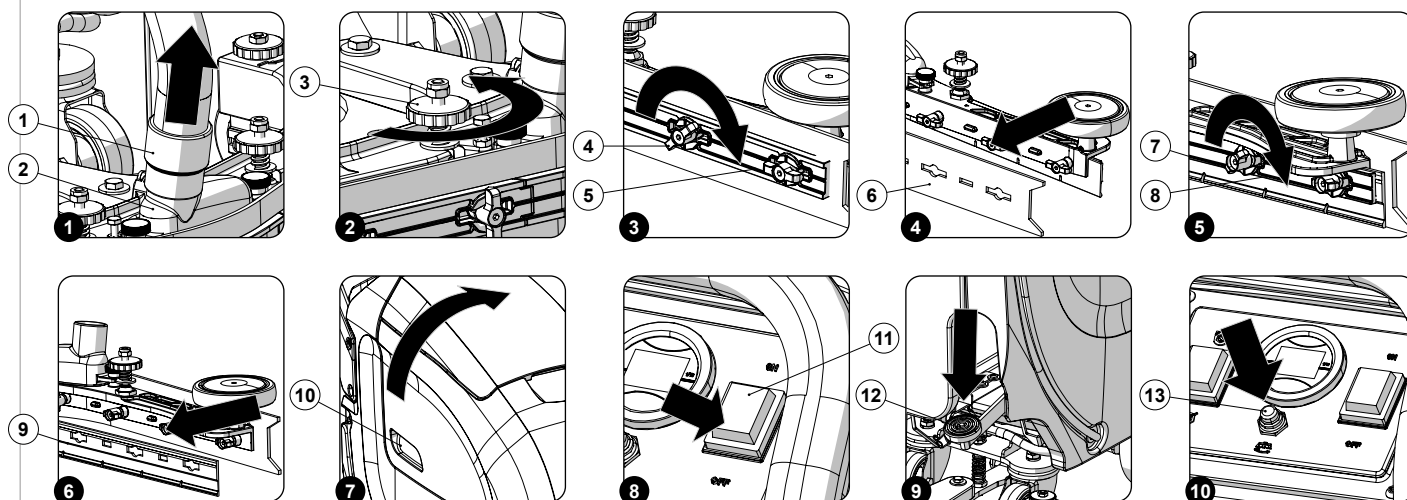

Before carrying out any routine maintenance operations, proceed as follows:

1. Take the machine to the maintenance area.

**N.B.:** the place designated for this operation must comply with current environmental protection regulations.

2. Make sure the machine is in a safe condition (see chapter "[MACHINE SAFETY MEASURES](#)").

**CAUTION:** it is recommended to wear the appropriate PPE (Personal Protective Equipment), suitable for the work to be carried out.

## REPLACING THE SQUEEGEE BODY RUBBER BLADES

Ensuring the integrity of the squeegee body's rubber blades guarantees better floor cleaning and drying results, as well as a longer service life for the vacuum motor. In order to replace the squeegee body's rubber blades, do the following:

1. Remove the vacuum hose (1) from the vacuum nozzle (2) on the squeegee unit (**Fig.1**).
2. Completely unscrew the knobs (3) on the squeegee body pre-assembly (**Fig.2**).
3. Remove the squeegee body from the slits in the squeegee connector.

**To remove the rear squeegee rubber blade, proceed as follows:**

- Turn the knobs (4) to a horizontal position and remove the rear rubber blade presser (5) (**Fig.3**).
- Remove the rear rubber blade (6) from the squeegee body (**Fig.4**).
- Replace the worn rubber blade with a new one.

**N.B.:** The rubber blade can be rotated symmetrically to be used more than once.

- Repeat the operations in reverse order to reassemble all the parts.

**To remove the front squeegee rubber blade, proceed as follows:**

- Turn the knobs (7) to a horizontal position and remove the front rubber blade presser (8) (**Fig.5**).
- Remove the rear rubber blade (9) from the squeegee body (**Fig.6**).
- Replace the worn rubber blade with a new one.
- Repeat the operations in reverse order to reassemble all the parts.

**N.B.:** Before using the machine, remember to adjust the squeegee body: see the section titled "[ADJUSTING THE SQUEEGEE BODY'S RUBBER BLADES](#)".

**N.B.:** It is recommended to replace both squeegee body blades in order to ensure good results when drying the floor.

## REPLACING THE BRUSH


The good condition of the brush guarantees better cleaning of the floor, as well as a longer brush head gearmotor lifespan. To replace the brush, proceed as follows:

1. Grip the handle (10) on the right-hand side of the recovery tank (**Fig.7**) and turn the tank as far as it will go.
2. Connect the electrical system connector to the battery connector.
3. Grip the handle (10) and turn the recovery tank to its working position.
4. Go to the front of the machine.
5. Turn on the machine, turning the main switch (11) to the "ON" position (**Fig.8**).
6. With the brush head partially raised from the floor, to lift the brush head body, use the pedal (12) located on the rear part of the machine (**Fig.9**), and press the brush release button (13) for more than three seconds (**Fig.10**).

**⚠ CAUTION:** do not stand near the brush head body while the brush is being uncoupled.

7. Clean the brush under running water to remove any impurities from its bristles.
8. See "[INSTALLING THE BRUSH](#)" for instructions on refitting the brushes in the brush head body.

## ADJUSTMENT INTERVENTIONS

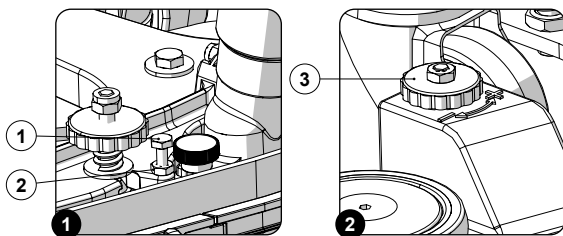

Before carrying out any adjustments, proceed as follows:

1. Take the machine to the maintenance area.



**N.B.:** the place designated for this operation must comply with current environmental protection regulations.

2. Make sure the machine is in a safe condition (see chapter "[MACHINE SAFETY MEASURES](#)").

**⚠ CAUTION:** it is recommended to wear the appropriate PPE (Personal Protective Equipment), suitable for the work to be carried out.

## ADJUSTING THE SQUEEGEE BODY'S RUBBER BLADES

The careful adjustment of the squeegee body rubber blades guarantees better cleaning of the floor.

### Adjusting the tilt of the squeegee body:

1. The angle of incline of the squeegee body is adjusted by means of the screw (1) located on the squeegee support (**Fig.1**).
2. To adjust the inclination of the squeegee body, loosen the nut (2) and tighten or loosen the screw (1) (**Fig.1**), until the squeegee body rubber blades are bent towards the outside evenly along the entire length by about 30° with respect to the floor.



**N.B.:** Turning the screw (1) clockwise increases the inclination of the central part of the squeegee body.

3. Once the adjustment has been completed, tighten the nut (2).

### Adjusting the height of the squeegee body:

1. The distance of the squeegee rubber blades from the floor can be adjusted by changing the distance between the wheels located on the squeegee support and the floor itself.
2. To adjust the height of the wheels, simply use the knobs (3) located on the squeegee support (**Fig.3**).



**N.B.:** To decrease the distance between the wheels and the floor, simply turn the adjustment levers (3) in the direction indicated by the arrows with the sign "-", while to increase the distance just follow the arrows with the "+" sign.



**N.B.:** By decreasing the distance between the squeegee support and the floor, the rubber blades present in the squeegee's body move closer to the floor.



**N.B.:** For effective drying, the wheels must be at the same distance from the floor.




**N.B.:** Check for proper adjustment by looking at the instrument (3) positioned on the squeegee body (**Fig.3**).

## BRUSHES AND BRUSH PAD HOLDER

CODE	QTY	BRISTLE	NOTES
404654	1	PPL 0.3	DISC BRUSH øDf=485mm øDe=508mm (COLOUR: BLUE)
405631	1	PPL 0.6	DISC BRUSH øDf=485mm øDe=508mm (COLOUR: WHITE)
404653	1	PPL 0.9	DISC BRUSH øDf=485mm øDe=508mm (COLOUR: BLACK)
405632	1	TYNEX	DISC BRUSH øDf=485mm øDe=508mm
449908	1	TAMPICO	DISC BRUSH øDf=485mm øDe=508mm
405527	1	-	BRUSH PAD HOLDER øDf=497mm WITH CENTER LOCK

## DISPOSAL



Dispose of the machine in accordance with the waste disposal regulations in force in the country in which the machine is being used.

## TROUBLESHOOTING

This chapter lists the most common problems linked with the use of the machine. If you are unable to resolve the problems with the information given here, please contact your nearest assistance centre.

PROBLEM	POSSIBLE CAUSE	SOLUTION
THE MACHINE DOES NOT START	The main switch is in the "OFF" position.	Make sure the main switch is set to the "ON" position. If it isn't, turn the key clockwise.
	Check that when switched on there are no alarm messages on the command display.	Stop the machine immediately, and contact a specialised service centre.
	Make sure that the batteries are correctly connected to each other and that the battery connector is connected to the electrical system connector.	Connect the batteries correctly inside the machine (see <a href="#">INSERTING THE BATTERIES IN THE MACHINE</a> ).
	Check the charge level of the batteries.	If the battery charge level is critical, perform a complete recharge cycle (see paragraph <a href="#">CHARGING THE BATTERIES</a> ).
THE BATTERIES ARE NOT CHARGED CORRECTLY (VERSIONS WITH AN ON BOARD BATTERY CHARGER)	The plug on the battery charger's cable is not correctly inserted into the socket on the battery charger itself.	Reconnect the battery charger's power cable.
	The plug on the battery charger's power cable is not correctly inserted into the electrical outlet.	Check that the battery charger power supply cable plug is connected to the mains socket.
	The characteristics of the mains power supply do not correspond to those required by the battery charger.	Check that the characteristics in the battery charger plate are the same as those of the mains supply.
	The LEDs of the battery charger blink repeatedly.	Referring to the battery charger use and maintenance manual, check the meaning of the flashing signals that the battery charger emits during the battery recharge stage.
THE MACHINE HAS A VERY LOW WORK AUTONOMY	Check the battery charge level, check the symbol on the command display.	If the battery charge level is critical, perform a complete recharge cycle (see <a href="#">RECHARGING THE BATTERIES</a> ).
THE MACHINE DOES NOT MOVE	The machine does not start.	Read the section <a href="#">"THE MACHINE DOES NOT START"</a> .
NOT ENOUGH DETERGENT SOLUTION ON THE BRUSH	The quantity of detergent solution in the water system is not sufficient for the work to be carried out.	Check that the amount of detergent solution present in the machine's water system is sufficient for the work to be carried out.
	Detergent solution filter obstructed.	Check the detergent solution filter isn't obstructed. If it is, clean it (see <a href="#">"CLEANING THE WATER SYSTEM FILTER"</a> ).



PROBLEM	POSSIBLE CAUSE	SOLUTION
THE MACHINE DOES NOT CLEAN CORRECTLY	The machine does not start.	Read the section " <a href="#">THE MACHINE DOES NOT START</a> ".
	Not enough detergent solution comes out.	Read the section " <a href="#">NOT ENOUGH DETERGENT SOLUTION ON THE BRUSH</a> ".
	The brushes have not been inserted correctly in the machine.	Check that the disc brushes have been correctly inserted in the machine (see " <a href="#">ASSEMBLING THE BRUSH</a> ").
	The type of brush used is not suitable for the dirt to be cleaned.	Make sure that the brushes fitted on the machine are appropriate for the task to be performed (see " <a href="#">BRUSHES AND BRUSH PAD HOLDER</a> ").
	The brush bristles are excessively worn.	Check the condition of the brush, and replace it if necessary (read " <a href="#">REPLACING THE BRUSH</a> ").
THE SQUEEGEE DOES NOT DRY PERFECTLY	The vacuum unit is obstructed.	Make sure the squeegee is free of obstructions (read " <a href="#">CLEANING THE SQUEEGEE BODY</a> ").
		Make sure the vacuum tube is free of obstructions (see " <a href="#">CLEANING THE VACUUM TUBE</a> ").
		Make sure the suction motor filter is free of obstructions (see " <a href="#">CLEANING THE SUCTION MOTOR FILTER</a> ").
	The cap on the recovery tank drainage tube is not properly positioned.	Check that the cap on the recovery tank drainage tube is positioned properly.
EXCESSIVE FOAM PRODUCTION	The recovery tank lid is not positioned correctly.	Check that the recovery tank lid is properly positioned on the machine.
	The detergent being used is not suitable.	Check that a low foam detergent has been used. If necessary, add a small quantity of anti-foam liquid to the recovery tank.
	The floor is not very dirty.	Dilute the detergent more.
THE MACHINE DOES NOT VACUUM CORRECTLY	The recovery tank is full.	Empty the recovery tank (read " <a href="#">EMPTYING THE RECOVERY TANK</a> ").
	The vacuum device is obstructed	Read the section " <a href="#">THE SQUEEGEE DOES NOT DRY PERFECTLY</a> ".



## UKCA DECLARATION OF CONFORMITY



The undersigned manufacturer:  
**COMAC-FIMAP (Shanghai) Co., Ltd.**  
科迈柯菲迈普（上海）机械有限公司  
Through the trustee appointed under the European Community  
**Industrial Cleaning Equipment Ltd.**  
declares under its sole responsibility that the products

### FLOOR SCRUBBING MACHINES

#### model E50 PLUS

comply with the provisions of Directives:

- Supply of Machinery (Safety) Regulations 2008.
- Electromagnetic Compatibility Regulations 2016.

They also comply with the following standards:

- BS EN 60335-1:2012+A2:2019
- BS EN 60335-2-72:2012
- BS EN 12100:2010
- BS EN IEC 61000-6-2:2019
- BS EN 61000-6-3:2007+A1:2011
- BS EN 62233:2008

The person authorized to compile the technical file:

Mr. Mark Bresnihan  
Sauber House, Unit 3, Rushington Business Park  
Chapel Lane, Totton, Hampshire, SO40 9AH

Chapel Lane, 2022/03/18

**Industrial Cleaning Equipment Ltd.**  
Legal representative  
Mark Bresnihan

Manufacturer:  
COMAC-FIMAP (Shanghai) Co., Ltd.  
科迈柯菲迈普（上海）机械有限公司  
Building 2, No. 299 Dongye road, Dongjing Town, Songjiang, Shanghai  
上海市松江区洞泾镇洞业路299号2栋 201619  
Website: [www.comac.it](http://www.comac.it); [www.fimap.com](http://www.fimap.com)

**Mandatory:**  
**Industrial Cleaning Equipment Ltd.**  
Sauber House, Unit 3, Rushington Business Park  
Chapel Lane, Totton, Hampshire, SO40 9AH  
Tel. 0800 389 3869 - Fax. 023 8042 8318  
E-mail: [info@ice-clean.com](mailto:info@ice-clean.com)  
Web: [www.ice-clean.com](http://www.ice-clean.com)



The undersigned manufacturer:  
**COMAC-FIMAP (Shanghai) Co., Ltd.**  
 科迈柯菲迈普（上海）机械有限公司  
 Through the trustee appointed under the European Community  
**Industrial Cleaning Equipment Ltd.**  
 declares under its sole responsibility that the products

## **FLOOR SCRUBBING MACHINES**

### **model E50 PLUS CB**

comply with the provisions of Directives:

- Supply of Machinery (Safety) Regulations 2008.
- Electrical Equipment (Safety) Regulations 2016.
- Electromagnetic Compatibility Regulations 2016.

They also comply with the following standards:

- BS EN 60335-1:2012+A2:2019
- BS EN 60335-2-72:2012
- BS EN 12100:2010
- BS EN 60335-2-29:2004+A11:2018
- BS EN IEC 61000-6-2:2019
- BS EN 61000-6-3:2007+A1:2011
- BS EN IEC 61000-3-2:2019
- BS EN IEC 61000-3-3:2019
- BS EN 55014-1:2017+A11:2020
- BS EN 55014-2:2015
- BS EN 62233:2008

he person authorized to compile the technical file:

Mr. Mark Bresnihan  
 Sauber House, Unit 3, Rushington Business Park  
 Chapel Lane, Totton, Hampshire, SO40 9AH

Chapel Lane, 2022/03/18

**Industrial Cleaning Equipment Ltd.**  
 Legal representative  
 Mark Bresnihan

Manufacturer:  
 COMAC-FIMAP (Shanghai) Co., Ltd.  
 科迈柯菲迈普（上海）机械有限公司  
 Building 2, No. 299 Dongye road, Dongjing Town, Songjiang, Shanghai  
 上海市松江区洞泾镇洞业路299号2栋 201619  
 Website: [www.comac.it](http://www.comac.it); [www.fimap.com](http://www.fimap.com)

**Mandatory:**  
**Industrial Cleaning Equipment Ltd.**  
 Sauber House, Unit 3, Rushington Business Park  
 Chapel Lane, Totton, Hampshire, SO40 9AH  
 Tel. 0800 389 3869 - Fax. 023 8042 8318  
 E-mail: [info@ice-clean.com](mailto:info@ice-clean.com)  
 Web: [www.ice-clean.com](http://www.ice-clean.com)







**Industrial Cleaning Equipment Ltd.**

✉ 3, Rushington Business Park

Sauber House,

Chapel Ln,

Totton,

Southampton

SO40 9AH

United Kingdom

☎ 0800 389 3869 - 📠 023 8042 8318

@ [info@ice-clean.com](mailto:info@ice-clean.com) 🌐 [www.ice-clean.com](http://www.ice-clean.com)